


Authorised Dealer:  
 PUSHKARNA SALES PVT LTD.  
 4772, Hauz Qazi, Delhi-110006.  
 Telefax : 011-23217239/23216378.  
 Emails : psp1@airtelmail.in,  
 sales@pushkarnasales.com  
 Site : www.pushkarnasales.com

## Automatic Pump Trap APT14

### Description

The Spirax Sarco automatic pump trap is a flanged or screwed discharge receiver pressure rated to unit is capable of automatic or pumping, depending on line. The unit is operated by steam to remove condensate from pipe under all operating conditions.

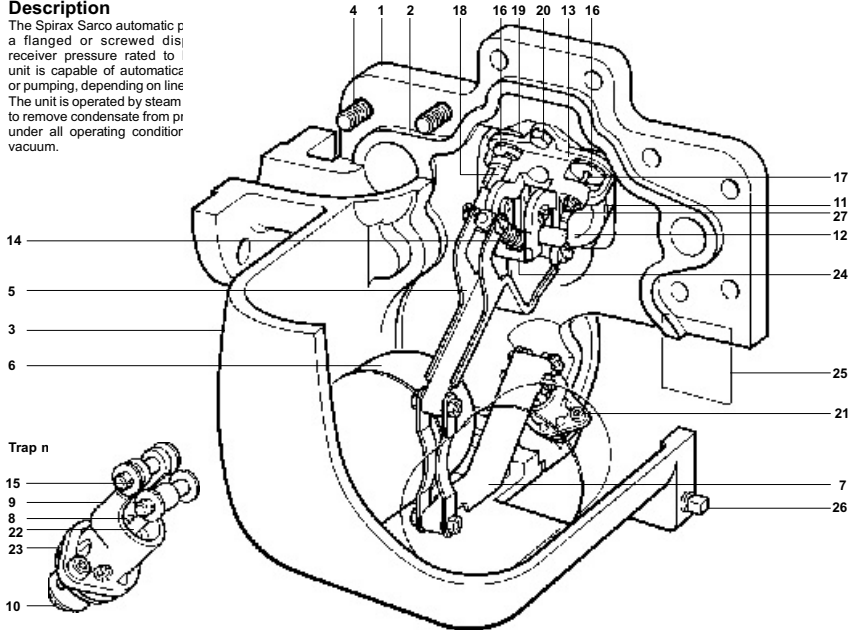

### Materials

No Part	Material	
1 Cover	SG iron	DIN 1693 GGG 40.3 / ASTM A395
2 Cover gasket	Synthetic fibre with PTFE surface coating	
3 Body	SG iron	DIN 1693 GGG 40.3 / ASTM A395
4 Cover bolts	Stainless steel	ISO 3506 Gr. A2 70
5 Pump lever	Stainless steel	BS 1449 304 S15
6 Float	Stainless steel	BS 1449 304 S15
7 Trap lever	Stainless steel	BS 1449 304 S15
8 Trap 2nd stage valve	Stainless steel	ASTM A276 440 B
9 Trap housing	Stainless steel	BS 3146 ANC 2
10 Ball		ASTM A276 440 B
11 Seat (inlet check valve)	Stainless steel	AISI 420
12 Flap (inlet check valve)	Stainless steel	BS 3146 ANC 4B
13 Pump mechanism bracket	Stainless steel	BS 3146 ANC 4B
14 Spring (pump)	Stainless steel	BS 2056 302 S26 Gr.2
15 Split pin	Stainless steel	BS 1574

16 Inlet and exhaust seat	Stainless steel	BS 970 431S29 / ASTM A276 431
17 Inlet valve	Stainless steel	ASTM A276 440 B
18 Exhaust valve	Stainless steel	BS 3146 ANC 2
19 Valve seat gasket	Stainless steel	BS 1449 409 S19
20 Pump mechanism bolt	Stainless steel	ISO 3506 Gr. A2 70
21 Trap housing bolt	Stainless steel	BS 6105 A4 80
22 Trap 1st stage valve	Stainless steel	BS 970 431S29 / ASTM A276 431
23 O' ring	EPDM	
24 Actuator arm	Stainless steel	BS 3146 ANC 2
25 Name-plate	Stainless steel	BS 1449 304 S16
26 Drain plug	Stainless steel	DIN 17440 1.4571
27 Inlet valve spring	Stainless steel	

### Certification

All pump traps are EN 10204 (3.1.B) certifiable. Available fully TUV approved on request.

### Design compliance

Shell designed in accordance with A.D. Merkblätter / ASME VIII.

### Spare parts

For spare parts please see TI-P612-07

## Spare parts

For spare parts please see TI-P612-07

## Sizes and pipe connections

Fluid connections		
Inlet	Outlet	Motive/Exhaust
DN40 (1½")	DN25 (1")	DN15 (½")
PN16 - EN 1092 / DIN 2533		BSP or NPT
ANSI 150 - B 16.5		NPT
JIS / KS10 - JIS B 2210 / KS B 1511		BSP
BSP - BS 21 parallel		BSP
NPT		NPT

## Limiting conditions


Body design conditions	PN16
Maximum motive inlet pressure	13.8 bar g
Maximum operating pressure	13.8 bar g
Maximum back pressure	5.0 bar g
Maximum operating temperature	198°C
Minimum operating temperature	-10°C
Cold hydraulic test pressure	24 bar g
Minimum installation head (from base of pump)	0.2 m
Recommended installation head (from base of pump)	0.3 m

## Installation

Full details are given in the Installation and Maintenance Instructions supplied with each unit.

## Dimensions/weight (approximate) in mm and kg

Size	A	B	C	D	E	F	G	H	Weight
DN40 x DN25 flanged	389	198	246	382	304	157	57	250	45
DN40 x DN25 screwed	350	198	246	382	304	157	57	250	45

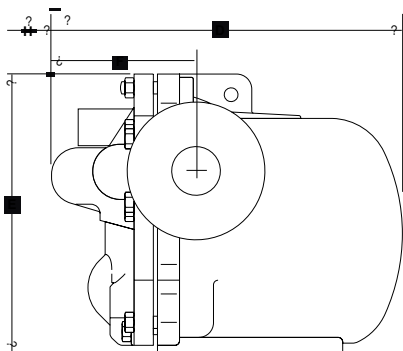

## Mechanical pumps and pump traps

### Nominal capacities

For full capacity details for a specific application consult Spirax Sarco.

To accurately size the pump trap, the following data is required.

1. Installation head available: from the base of the pump trap to the centre line of the heat exchanger / process condensate outlet (m).
- If the outlet is mounted vertically, then this should be from the base of the pump to the face of the outlet.
2. Motive steam pressure available to power the pump trap (bar g).
3. Total back pressure in the condensate return system (bar g). See note below.
4. Heat exchanger full load operating pressure (bar g).
5. Heat exchanger maximum steam load (kg/h).
6. Minimum temperature of secondary fluid, (°C).
7. Maximum controlled temperature of secondary fluid (°C).

Size	DN40 x DN25
Pump discharge/cycle	5 litres
1 metre installation head	
At: 5 bar g motive pressure	Max. trapping capacity 4 000 kg/h
1 bar g total back pressure	Max. pumping capacity 1 100 kg/h

### Note:

Total lift or back pressure BP (static head plus pressure head in the return system) must be below the motive fluid inlet pressure to allow pump capacity to be achieved.

$$BP \text{ (back pressure)} = (H \times 0.0981) + (P) + (Pf)$$

Height (H) in metres x 0.0981 plus pressure (P) bar g in the return line, plus downstream piping friction pressure drop (Pf) in bar. (Pf can be ignored if the downstream pipework is less than 100 metres to a non-flooded condensate return and has been sized to take into account the effect of flash steam at the heat exchanger's full load operating conditions.)

## How to specify

The pump trap shall be a Spirax Sarco automatic pump trap type APT14 operated by steam to 13.8 bar g. No electrical energy shall be required.

Body construction from SG iron (DIN 1693 GGG 40.3 dual certified with ASTM A395) with a swing type inlet check valve and ball type outlet check valve.

The internal trap mechanism shall contain dual stainless steel floats connected with a two stage trap, while the internal pump mechanism shall be a stainless steel single tension spring snap-action device with no external seals or glands.

**How to order** 1 - Automatic pump trap, type APT14, DN40 x DN25, flanged PN16 with BSP motive fluid connections.