


SLUICE VALVES

RIISING STEM, OUTSIDE SCREW

CAST IRON

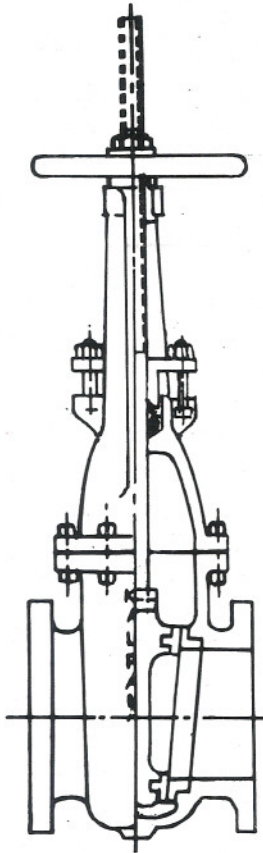

Normal Standard : BS : 1735, ASA class 125 Lb or outside screw rising type with Valve face to face dimension similar to IS : 780, DIN or as per Customer's requirements.

Pressure Rating : PN-1.0 & PN-1.6.

Operational Arrangement : Electrical/pneumatic Actuator may be provided or servocontrol.

Special Arrangement : Drain Plug, Indicator, Chain Wheel, Bevel Gear reducer Locking Arrangement, TAC certificate may be provided.

End Connection : Flanges may be as per customer's requirements.

Test Pressure

	P.N.-1.0	P.N.-1.6
Body	15 kg/cm ²	24 kg/cm ²
Seat	10 kg/cm ²	16 kg/cm ²

Dimensions in mm

Size	50	65	80	100	125	150	200	250	300
Face to Face	215	230	230	255	266	280	318	355	380
Centre to Top (Max)	Shut		473	525		735	880	968	1242
	Open		553	685		920	1080	1218	1592



Kalpana Valves Manufacturing Co. (P) Ltd.

Regd. Office :

Ichapur H.I.T. Road, Sastibagan, Santragachi, Howrah - 711 104 (W.B.)